




Factory Connect Camera System: Toyota

All Models equipped with 6.1" Screen


1 Remove radio / multi-media assembly.



2 Unplug factory 16 pin plug and plug into female end of T-Harness. Plug male end of harness into rear of radio. Connect camera RCA cable to T-Harness.

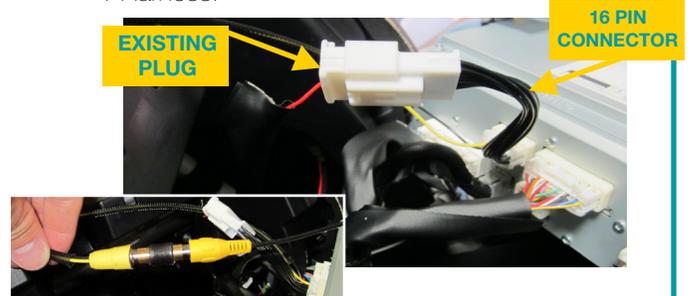

3 A. Connect camera Red wire to suitable ACC or IGN +12V. Ground camera Black wire.

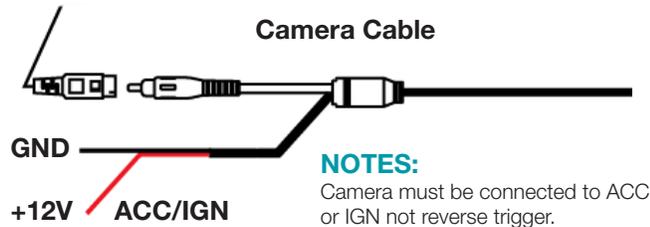


B. Route camera cable to rear of vehicle.

4 Use foam gasket to determine camera mounting location. Drill a 19mm hole, mount camera and secure with nut.



5 Connect the camera cable to the camera. Program optional Parking Lines and/or Image Flip.

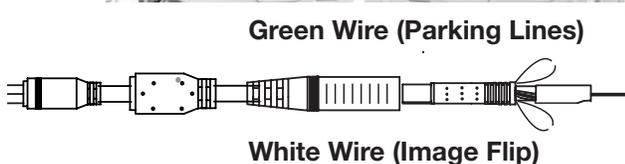

6 Check installation by putting vehicle in reverse to make sure image is correct. Reassemble all parts of the vehicle to complete installation.



Installation Guide



Factory Connect Camera System:


Toyota

For Models Equipped with 6.1" Screen

ATTENTION:

On some 2013 model year Toyotas, reverse trigger is not present at radio. You must add a pin to the 28 pin plug located next to the 16 pin plug provided by EchoMaster.

The pin will go in Pin# 2 located on the top row second pin from right (see diagram provided). Insert pin provided and connect to positive 12 volt reverse.

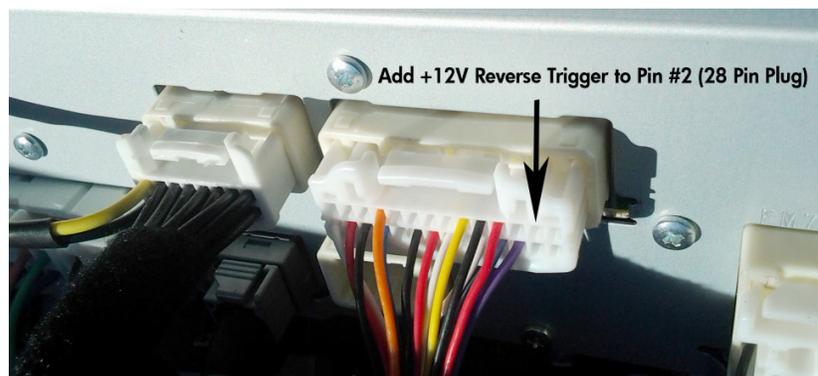

15500 Lightwave Drive, Suite 202 Woolmer Way, Bordon, Hampshire,
Clearwater, Florida 33760 GU35 9QE, United Kingdom

EchoMaster is a Power Brand of AAMP Global

EchoMaster.com

2

email - support@aampglobal.com (US)
tel - 1-800-477-2267 (East Coast) - 1-888-883-2790 (West Coast)
email - technical.eu@aampglobal.com (Europe)